


10.7HP Honda CET 2.5" Intake Fire Pump Package Specifications

Key Features:

- GX340 Honda engine, 10.7 HP, manual recoil start
- CET Fire Pump with PSI Gauge on discharge
- Bronze impeller for corrosion resistance to salt and brackish water
- Pump sprays water 110 Feet from 1.5" nozzle after 100 feet of fire hose
- Pump produces Max 120 PSI; 105 PSI at 70 GPM, 90 PSI at 100 GPM
- Pressure Relief Valve protecting pump when nozzles closed and engine running
- Two 1.5" fire hose connections
- Exhaust-driven primer pulls water into pump
- 300 feet of Fire Hose (200' of 1.5", 100' of 1.0") with nozzles and all connections
- Portable using Hand Truck or Handles
- No-flat maintenance free tires, and Operating Instructions installed on Hand Truck

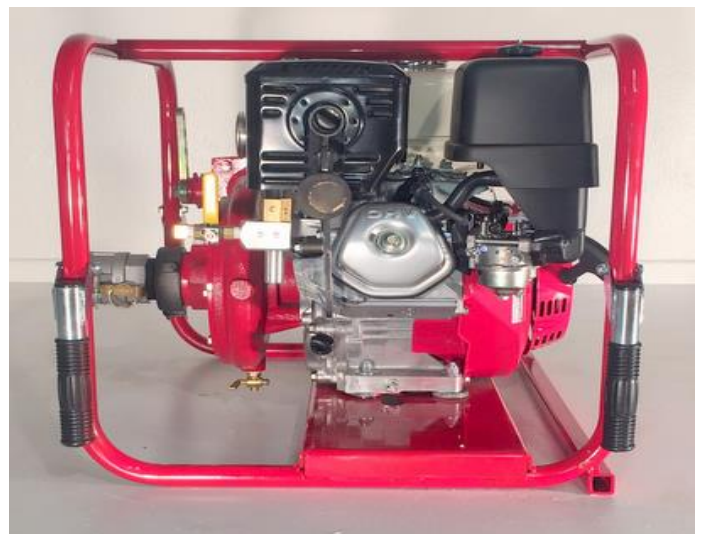


10.7HP Honda CET Pump Package Specifications

Fire Pump Package	11HP Honda CET
Pump Pressure (PSI) at:	
70 GPM	105
100 GPM	90
150 GPM	-
200 GPM	-
250 GPM	-
Water Spray from 1.5" Nozzle after 100 Feet of Fire Hose	110
Factors Affecting Selection:	
Portable	YES
Thermo Gel as primary protection	YES
Water Supply < 3k Gal	NO
Nozzle 20'+ higher than Pump (A)	YES
Nozzle 40'+ higher than Pump (A)	NO
Hose/Pipe Run > 400' level ground	YES
Two 1.5" Fire Hoses Concurrently	YES
Electric Start	YES, as Option
Perimeter High Volume Sprinkler System	YES
Exhaust driven Primer	YES
Salt Water	YES
Diesel Fuel	NO
Fire Hose in Standard Package	200 Feet
Pricing US\$, excluding shipping and CA Sales Tax	
Manual Start	\$ 5,899
Electric Start (C)	\$ 6,399



Pump Performance Curves 6 to 13 HP Engines

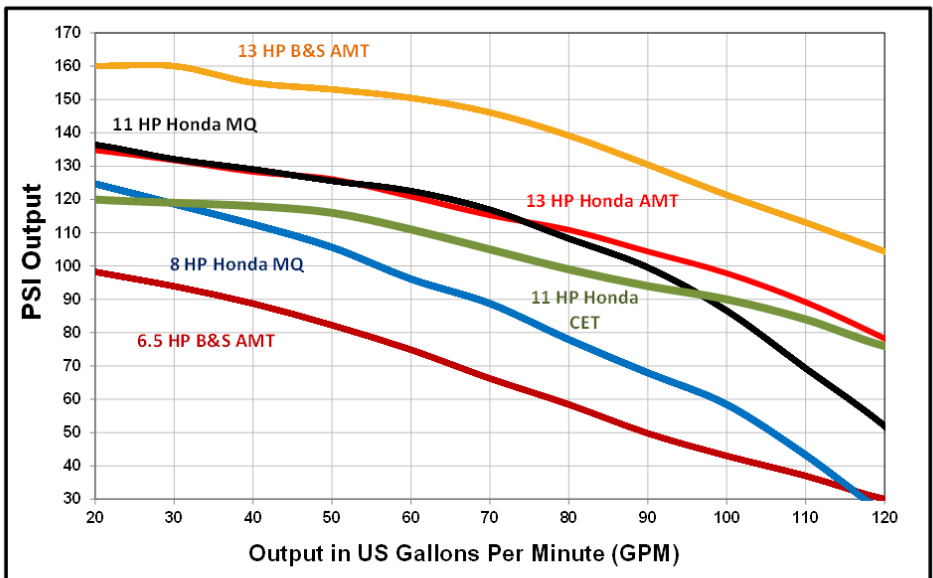

Sold by: **Fire Pump and Hose Packages LLC** www.FirePumpAndHose.Com
 Email: Info@FirePumpAndHose.Com (800) 797-1310

Options Available:

- 6 Gallon Axillary Fuel Tank and Fuel Switch for use with Fire Sprinklers and Irrigation
- Check Valve on Discharge for applications where fire hose nozzle is 20+ feet higher than Fire Pump (can be used in combination with Gated Wye Valve)
- Upgraded Pistol Grip D-Handle Nozzle for improved control over water volume
- Custom Pump Cover for protection of equipment
- Water Tank connection fittings
- Lake/Ocean Float Dock for Suction Hose
- High Volume Filter for Suction Hose

10.7HP Honda CET Pump Package Specifications

ENGINE SPECIFICATIONS

- Honda, model GX340, air cooled engine
- Single cylinder, 4-stroke gasoline engine
- Manual recoil start.
- 1.6 gallon (6.1 l) integrated fuel tank

PUMP UNIT SPECIFICATIONS

- Direct drive C.E.T. single stage centrifugal pump
- Pump body made from resistant aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- One 2 1/2" (65 mm) delivery outlet with 1/4-turn ball valve
- One 2 1/2" (65 mm) suction inlet
- Dimensions: Length: 23 1/4" (590 mm); Width: 22 3/8" (568 mm); Height: 23 3/4" (600 mm)
- Weight: 115 lbs (52 kg)


INCLUDED ACCESSORIES

- Pressure gauge
- Low oil alert

PERFORMANCE

290 GPM @ 10 PSI
190 GPM @ 50 PSI

120 GPM @ 75 PSI
80 GPM @ 100 PSI

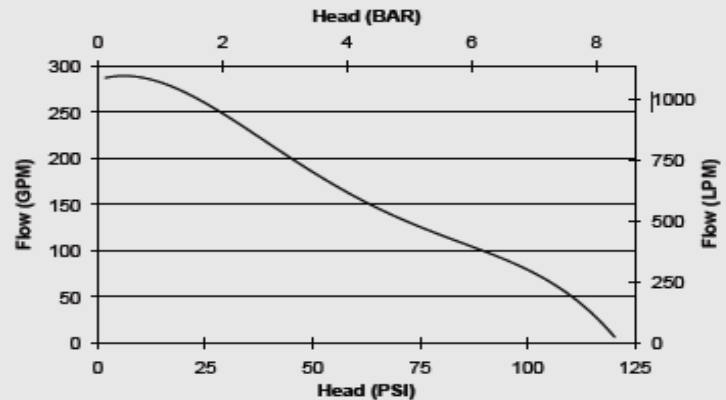

LIMITED WARRANTY

- 3 YEARS

