


10.7HP Honda MQ, Manual Start, Fire Pump Package Specifications

Key Features:

- GX340 Honda engine, 10.7HP, low oil shutoff
- Manual Recoil start
- MQ high pressure pump; Two stage impellers, aluminum alloy with PSI Gauge on discharge
- Pump sprays water 120 Feet from 1.5" nozzle after 100 feet of fire hose
- Pump produces Max 142 PSI; 115 PSI at 70 GPM, 87 PSI at 100 GPM
- 15 Foot 2.0" Suction Hose with Cam Lock fitting
- Pressure Relief Valve protects pump from overheating when nozzles are closed and engine running.
- Two fire hose connections – 1.5" and 1.0". Pump can run two fire hoses concurrently and two 1.5" fire hoses with optional Gated Wye Valve
- 200 feet of Fire Hose (150' of 1.5", 50' of 1.0") with nozzles for both hose sizes (barrel style, twist on/off)
- Fire Pump frame is carried on 2-wheel equipment cart and can be removed from cart for transport by SUV or truck in the standard configuration

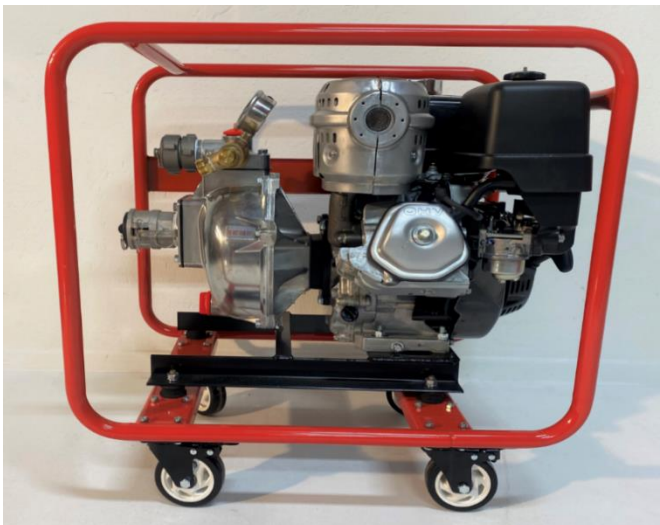

Three configurations available:

- * Portable on upright 2-wheel equipment cart with no-flat tires and hose hanger (image above), or
- * Portable with 4 lockable castor wheels on frame (image at left), with fire hoses and nozzles stored in all-weather lockable container (included with Package), or
- * Stationary with Fire Pump mounted near water supply source (no equipment cart) with fire hoses and nozzles stored in all-weather lockable container (included with Package).



Fire Pump and Hose Packages LLC

1654 West 11th Street Upland, CA 91786

Office (800) 797-1310 Fax (866) 888-883-6160


Helping Homeowners protect property from Wildfires with Water Tanks, Fire Retardant Sprayers and Gel, and portable high pressure water pump packages.

10.7HP Honda MQ Pump, Manual Start, Package Specifications

Fire Pump Package	11HP Honda MQ
Pump Pressure (PSI) at:	
70 GPM	115
100 GPM	87
150 GPM	-
200 GPM	-
250 GPM	-
Water Spray from 1.5" Nozzle after 100 Feet of Fire Hose	120
Factors Affecting Selection:	
Portable	YES
Thermo Gel as primary protection	YES
Water Supply < 3k Gal	YES
Nozzle 20'+ higher than Pump (A)	YES
Nozzle 40'+ higher than Pump (A)	YES
Hose/Pipe Run > 400' level ground	YES
Two 1.5" Fire Hoses Concurrently	YES, with Gated Wye
Electric Start	YES, as Option
Perimeter High Volume Sprinkler System	NO
Exhaust driven Primer	NO
Salt Water	NO
Diesel Fuel	NO
Fire Hose in Standard Package	200 Feet
Pricing US\$, excluding shipping and CA Sales Tax	
Manual Start	\$ 3,599
Electric Start (C)	\$ 4,099



**Pump Performance Curves
6 to 13 HP Engines**

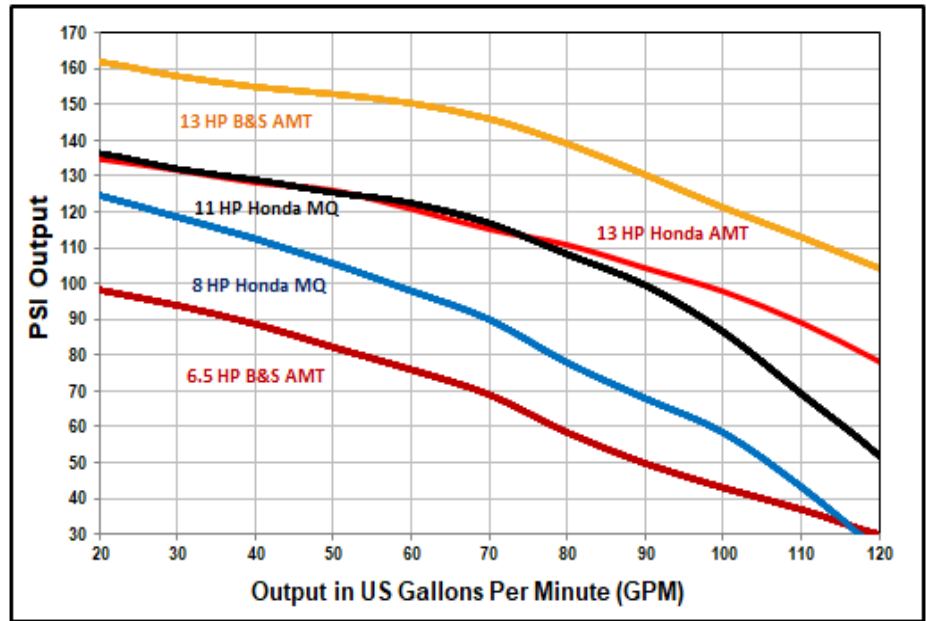

Sold by: Fire Pump and Hose Packages LLC www.FirePumpAndHose.Com
 Email: Info@FirePumpAndHose.Com (800) 797-1310

Optional Equipment:

- Gated Wye Valve for Two 1.5” discharges
- 6 Gallon Axillary Fuel Tank and Fuel Switch for use with Sprinklers and Irrigation
- Check Valve on Discharge for applications where fire hose nozzle is 20+ feet higher than Fire Pump (can be used in combination with Gated Wye Valve)
- Upgraded Pistol Grip D-Handle Nozzle for improved control over water volume
- Custom Pump Cover for protection of equipment
- Water Tank connection fittings
- Lake/Ocean Float Dock for Suction Hose
- High Volume Filter for Suction Hose

10.7HP Honda MQ Pump, Manual Start, Package Specifications

